

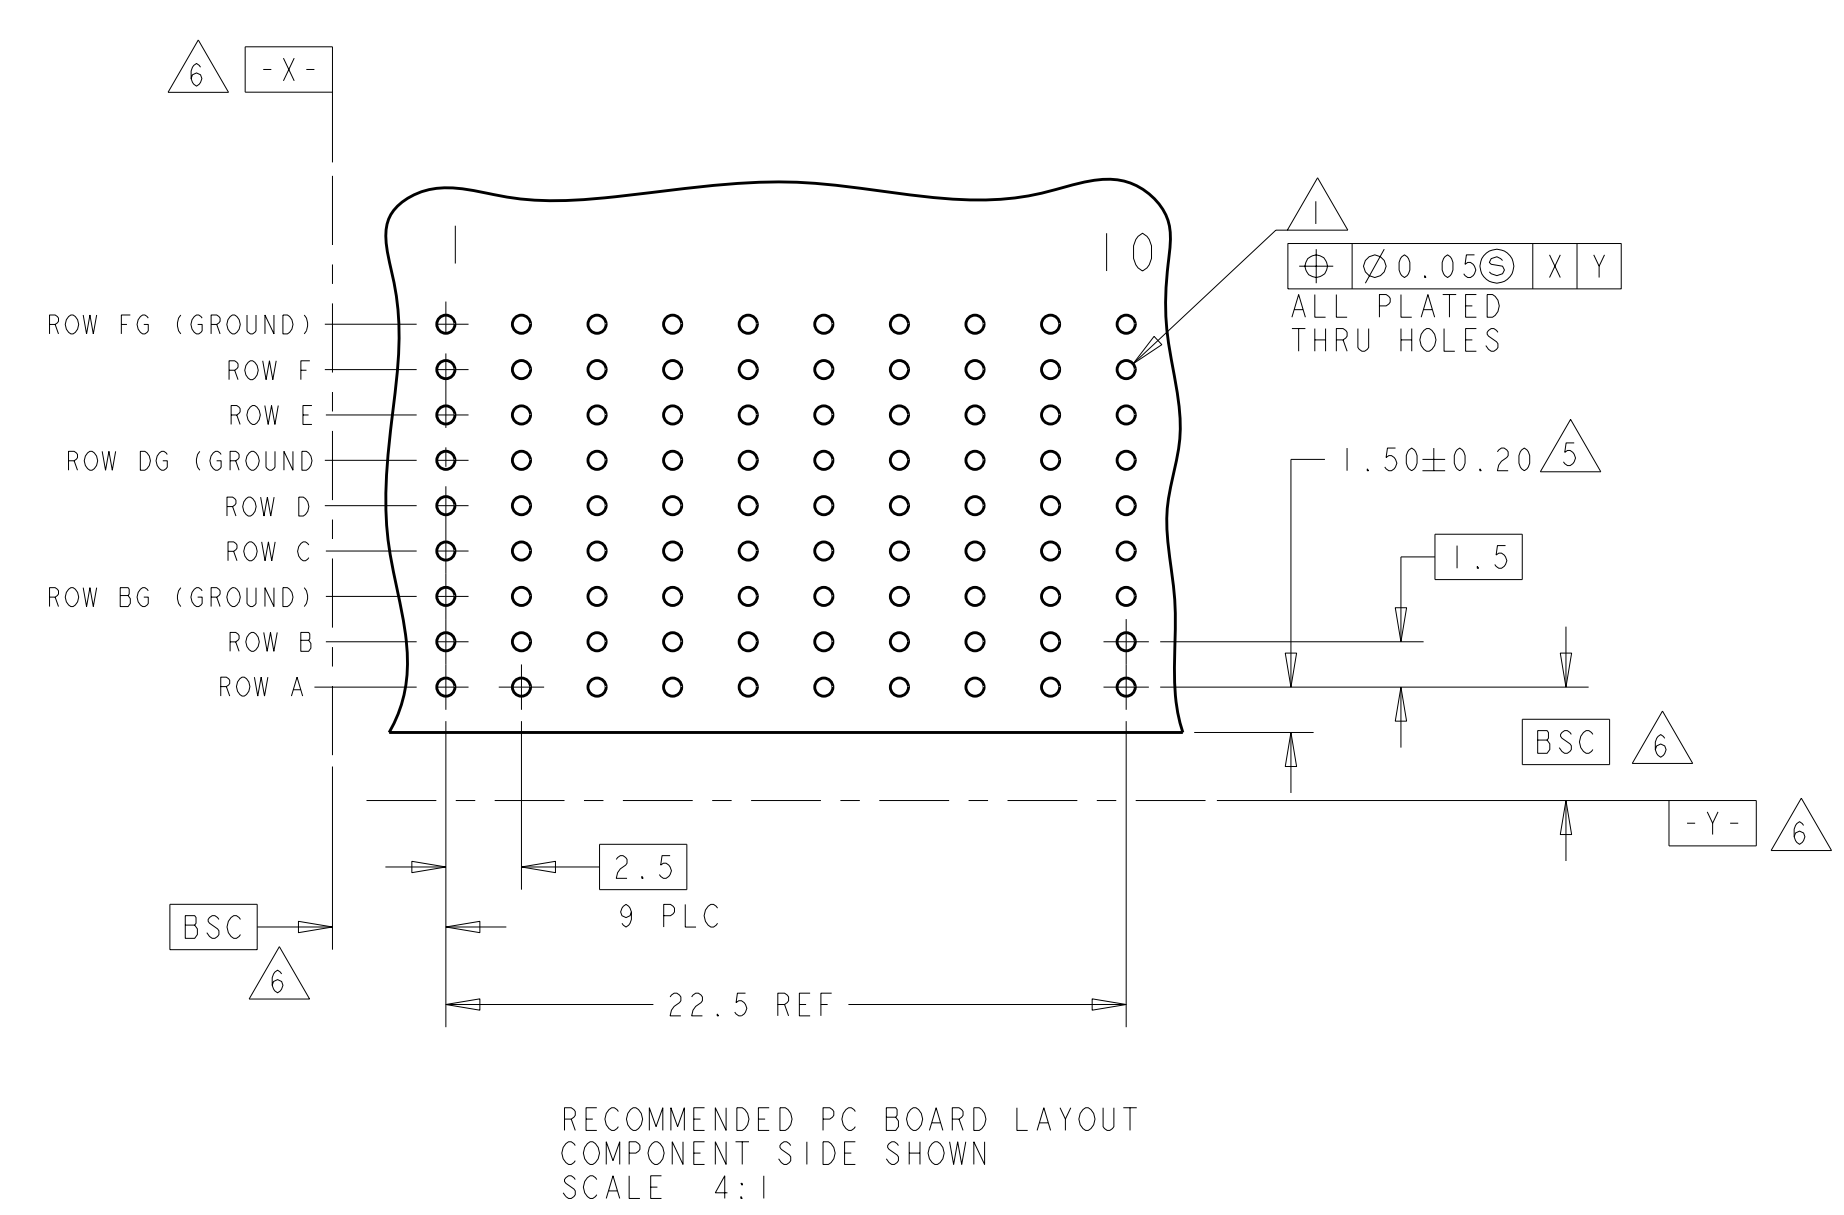


LOC		DIST		REVISIONS			
AD	00	REV	DATE	BY	CHK	APPD	
A		REV PER ECO-11-007577	13APR2011	RKC	JE		

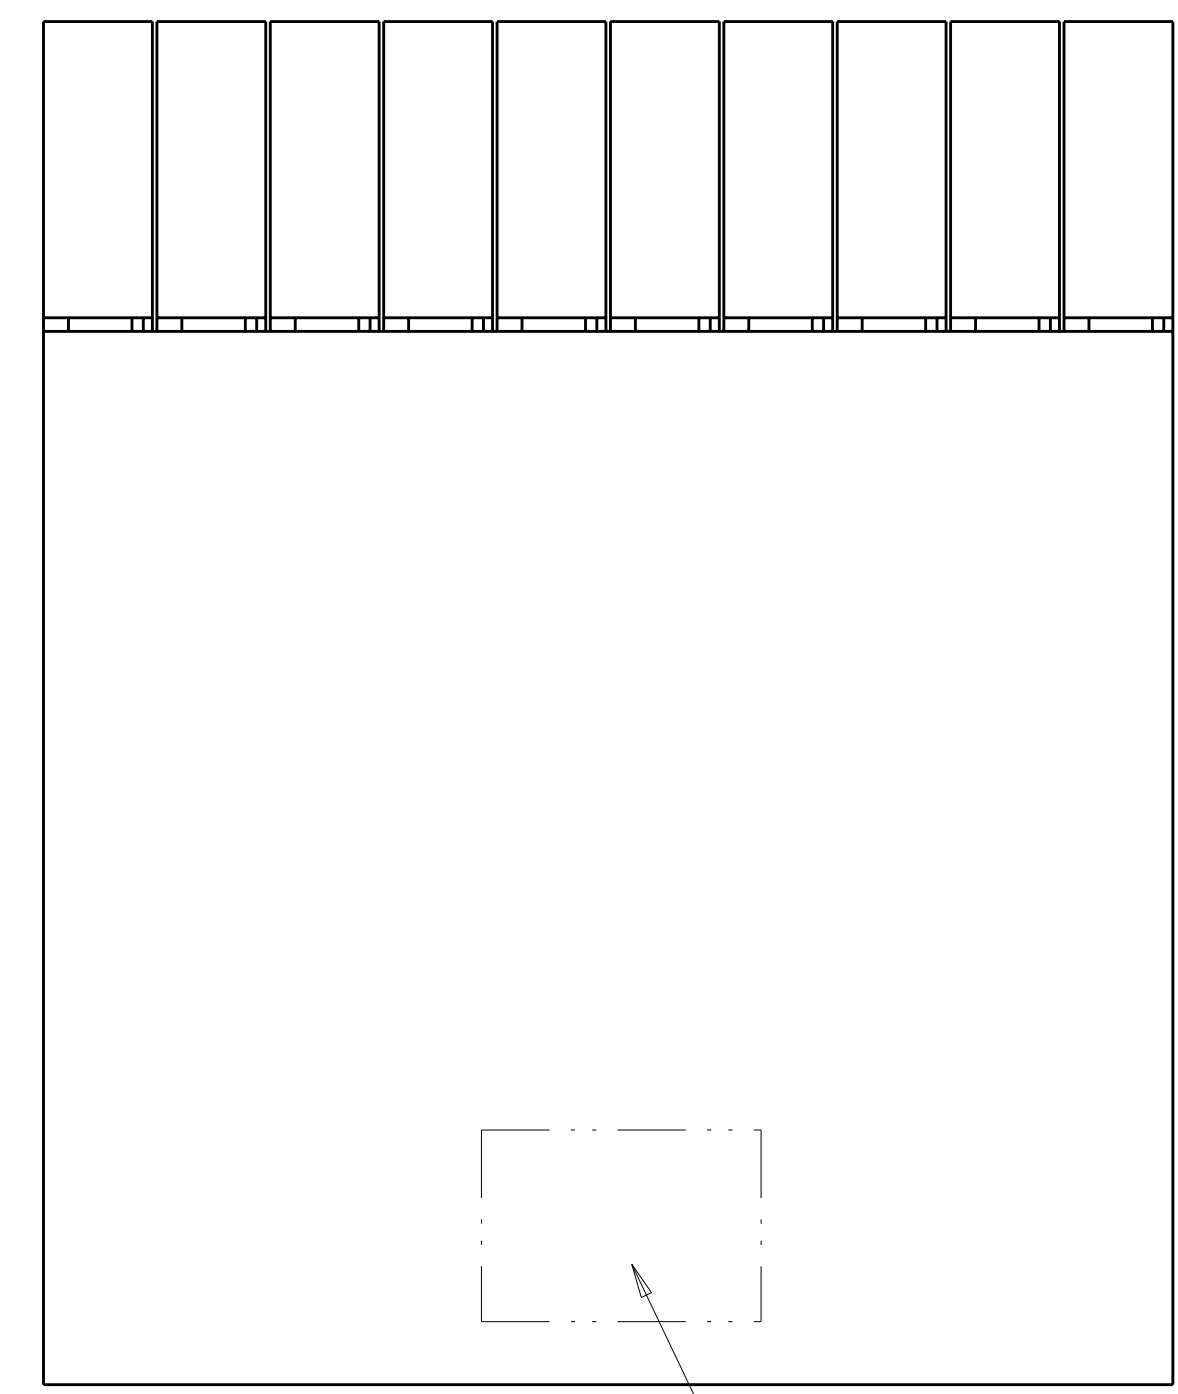


- 1 REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- 2 MATERIAL:
 CONTACT & SHIELD - PHOSPHOR BRONZE
 HOUSING & CHICKLET - GLASS FILLED POLYESTER
- 3 FINISH: SIGNAL AND GROUND CONTACTS:
 MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS
 COMPLIANT PIN AREA: 0.5 μm MIN MATTE TIN OVER BASE PLATING
- 4 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE IN APPROXIMATE AREA SHOWN
- 5 DIMENSION APPLIES TO CENTERLINE OF THRU HOLE
- 6 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995

RECOMMENDED PC BOARD LAYOUT
 COMPONENT SIDE SHOWN
 SCALE 4:1

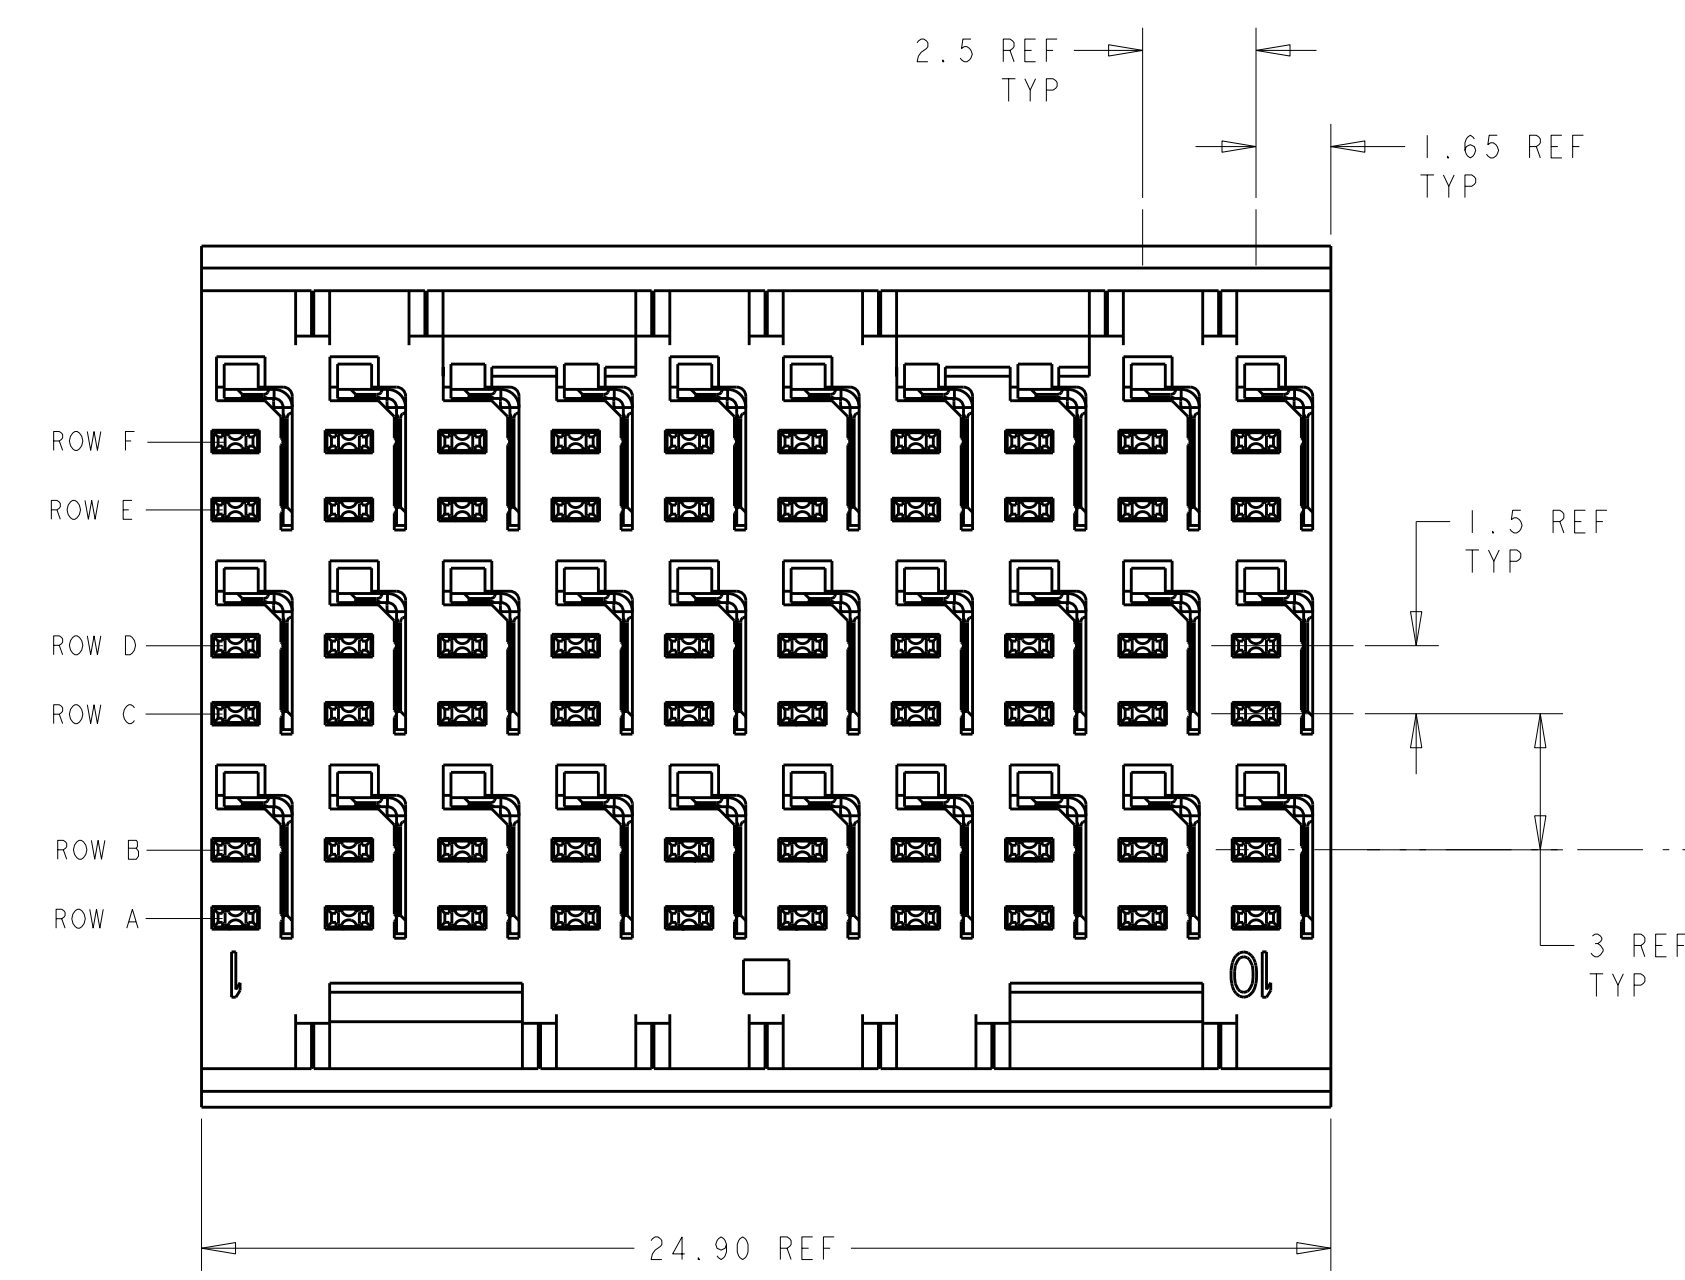

TOP SURFACE OF DAUGHTER CARD

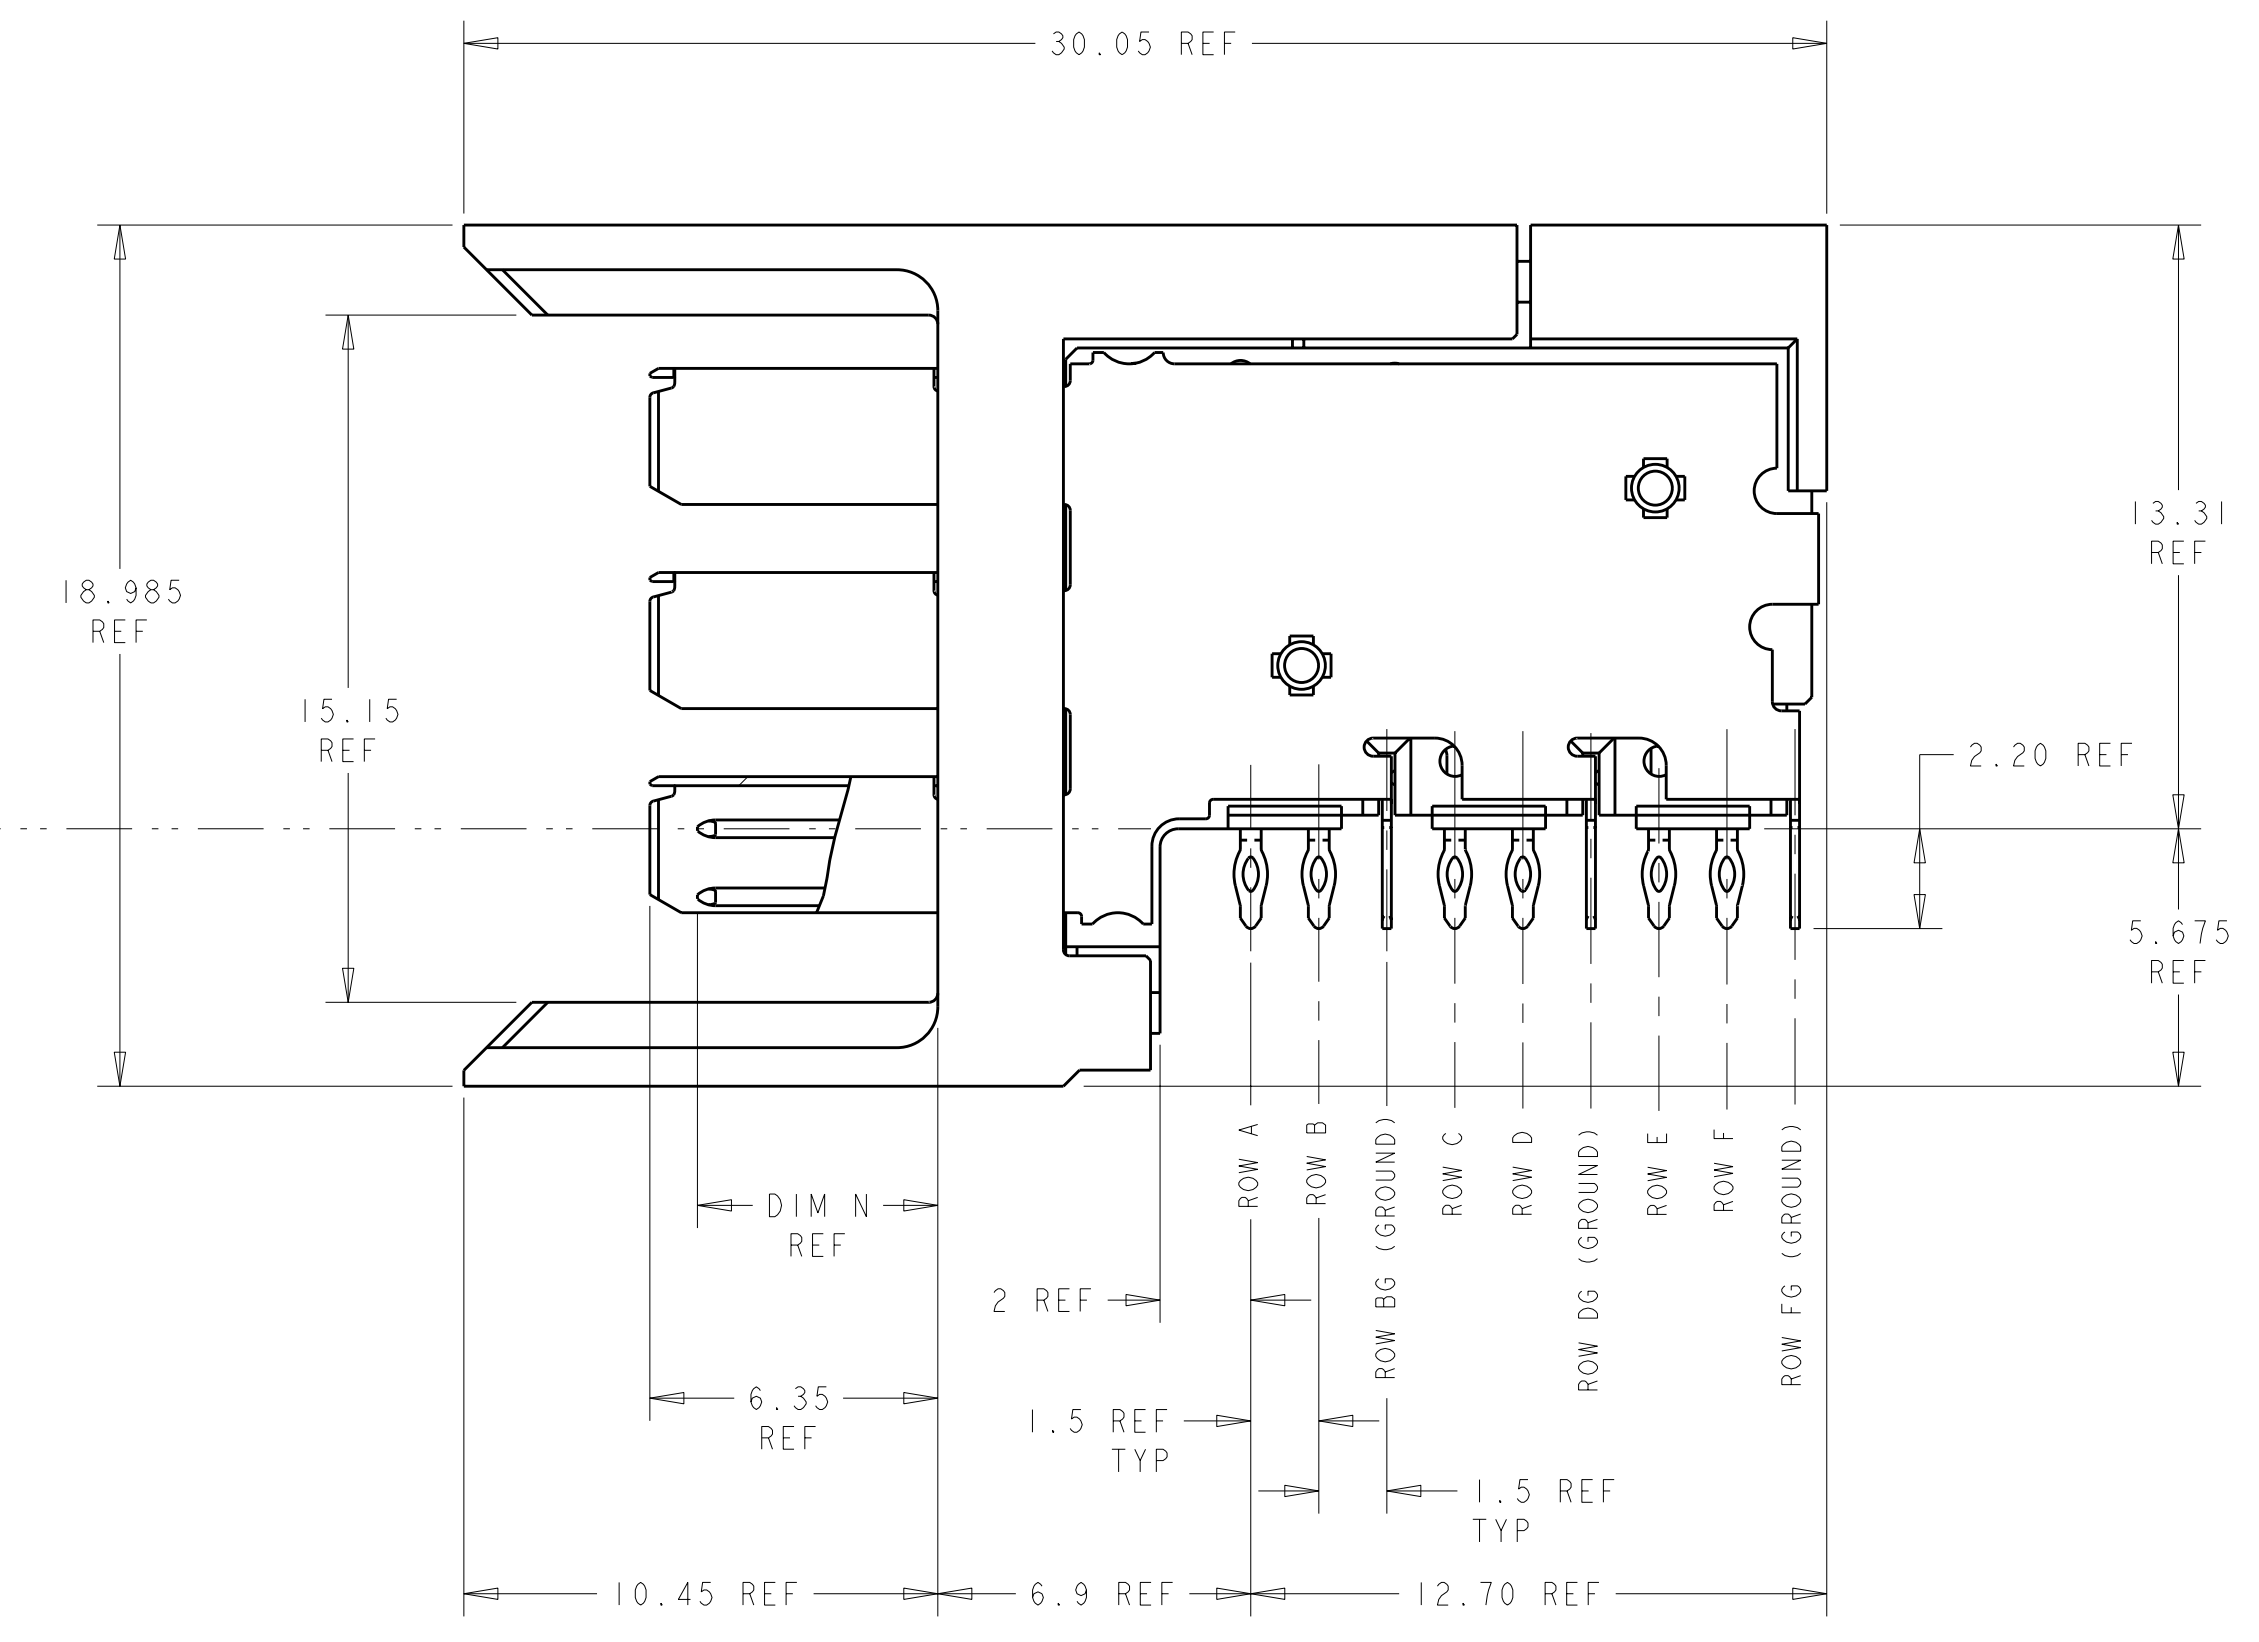

6469183-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 25 JUL 2004 S. J. MAGARO		TE Connectivity	
DIMENSIONS: mm		CHK 25 JUL 2004 R. A. PATTERSON		NAME HEADER ASSEMBLY, RIGHT ANGLE, 3 PAIR, HMZd	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 9 PLC ± 3 PLC ± 5 PLC ± 4 PLC ± ANGLES ±		APVD		PRODUCT SPEC	
MATERIAL		FINISH		APPLICATION SPEC	
CUSTOMER DRAWING		WEIGHT		SIZE CAGE CODE DRAWING NO A100779C-6469183	
SCALE 6:1		SHEET 1 OF 1		REV A	