

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 19 ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS						
		P	LTR	DESCRIPTION	DATE	DWN	APVD	
J			B2	REVISED	ECR-11-011495	02JUN11	TS	KB

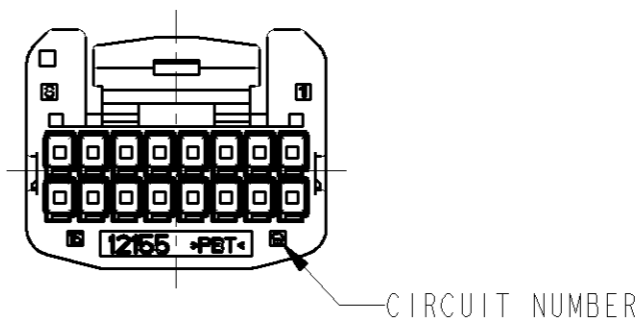
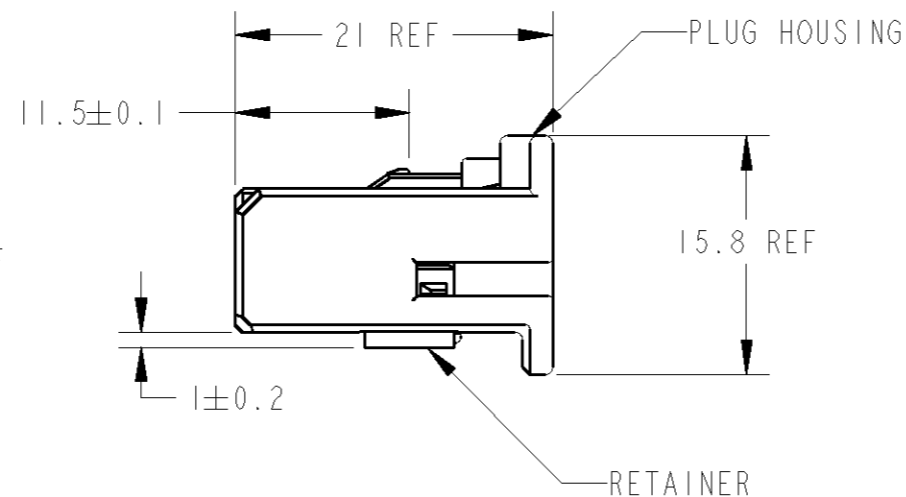
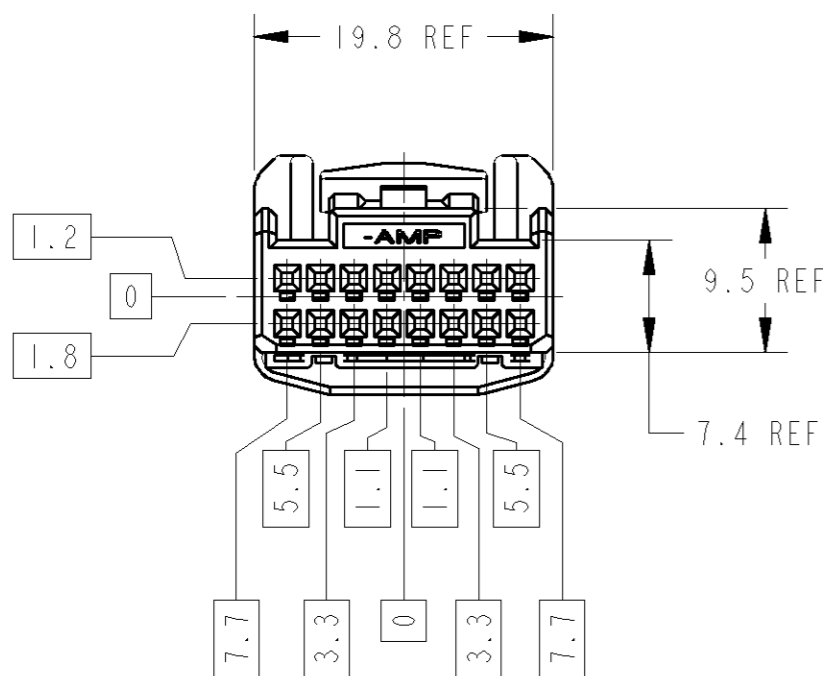
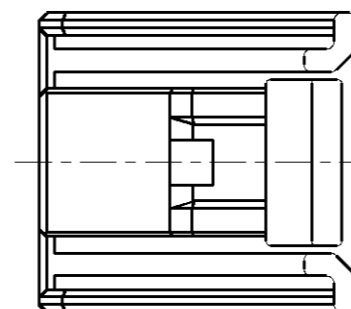


TABLE-1

POS 極数	CAP ASSEMBLY PART NO キャップ 型番
16	1318382

TABLE-2

SIGNAL		TERMINAL NO 端子型番	APPLICABLE WIRE RANGE 適用電線
025	TIN	1123343-1	AVSS/CAVUS/AVSSH-f 0.3~0.5mm ² CAVS 0.22~0.5mm ²

PACKING STYLE 梱包形態	COLOR	PART NUMBER
PAPER BOX ダンボール	BLACK	1318386-2
PLASTIC BAG ビニール袋	NATURAL	1318386-1
OUTER 外装		
INNER 内装		

1. RETAINER SHOULD BE SET TO THE PRE- ASSEMBLY POSITION WITHIN THE PLUG HOUSING WHEN SHIPPED TO THE CUSTOMER
 2. THE RETENTION LATCH OF THE RETAINER MUST BE OUT SIDE OF PLUG HOUSING WHEN PRE-ASSEMBLY
 3. RETAINER RETENTION FORCE FROM HOUSING : 20N MIN
 4. INSTRUCTION SHEET NO : 411-5928
 5. PART NUMBER OF CAP HOUSING TO BE MATED : SEE TABLE -1
 6. APPLIED TERMINAL : SEE TABLE -2
- △ RETAINER IS THE SAME COLOR AS HOUSING.

1. プラグハウジングにリテーナーを仮止して出荷する
 2. 仮止時リテーナー突起がハウジングの外側に出ていること
 3. リテーナーの仮止保持力は 20N 以上
 4. 取扱い説明書 NO : 411-5928
 5. 嵌合相手型番は TABLE -1参照
 6. 適用端子は TABLE -2参照
- △ リテーナーはハウジング本体と同色とする。

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Y. NOGUCHI 10MAR00	TE TE Connectivity	
DIMENSIONS: 単位: 概 mm		CHK N. SAI 10MAR00		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 = ± 0.3		APVD N. SAI 10MAR00	NAME 025 SERIES 16 POSITION PLUG HOUSING ASSEMBLY	
0-PLC ±		PRODUCT SPEC 108-5668	SIZE A3	
1-PLC ±0.5		APPLICATION SPEC 114-5250	CAGE CODE 00779	DRAWING NO C=1318386
2-PLC ±0.13		WEIGHT 2.78 g	RESTRICTED TO	
3-PLC ±0.013		CUSTOMER DRAWING	SCALE 5:1	SHEET 1 OF 1
4-PLC ±0.001			REV B2	
ANGLES ±3'00"				
MATERIAL 材料 PBT	FINISH 仕上 NATURAL			