PDUMNH32HVAT

Single-Phase Monitored 1U Rack-Mount PDU







Automatic Transfer Switch



32A Max Capacity



Multimode **Load Meter**




Network Interface



1U Horizontal **Rack-Mount**



IEC 309 32A Blue (2P + E) Input/Outputs

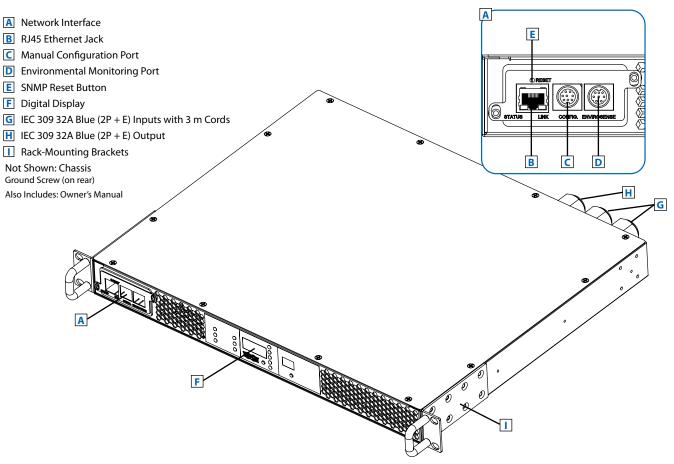






HOHS
PDUMNH32HVAT
230V
50 / 60 Hz
7.4kW
32A
2 x IEC 309 32A Blue (2P + E)
1 x IEC 309 32A Blue (2P + E)
3 m
1U Horizontal Rack-Mount
44 x 430 x 356 mm
8.3 kg
Tested to CE 60950-1 + A1, A2, Class A; RoHS Compliant

- Distributes 7.4kW single-phase 230V redundant power to devices with non-redundant power supply configurations
- · Remote monitoring via SSH, telnet or SNMP
- Real-time load/current display with billing-grade accuracy (+/- 1%)
- 1U height and 19-inch (482.6 mm) width ideal for **Rack-Mount applications**


SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS




Chicago, IL 60609 USA 773.869.1234 www.tripplite.com

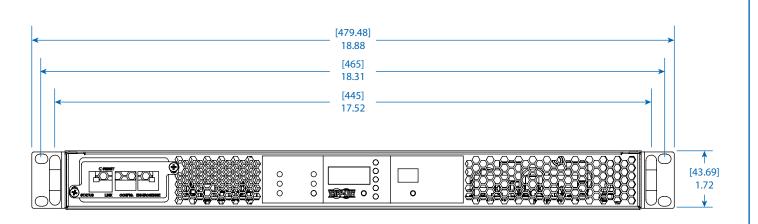

FRONT VIEW

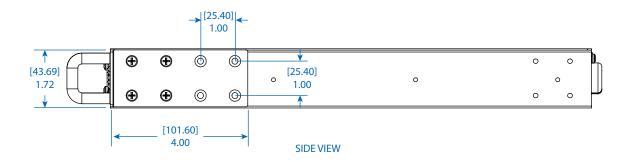




REAR VIEW



Chicago, IL 60609 USA 773.869.1234 www.tripplite.com

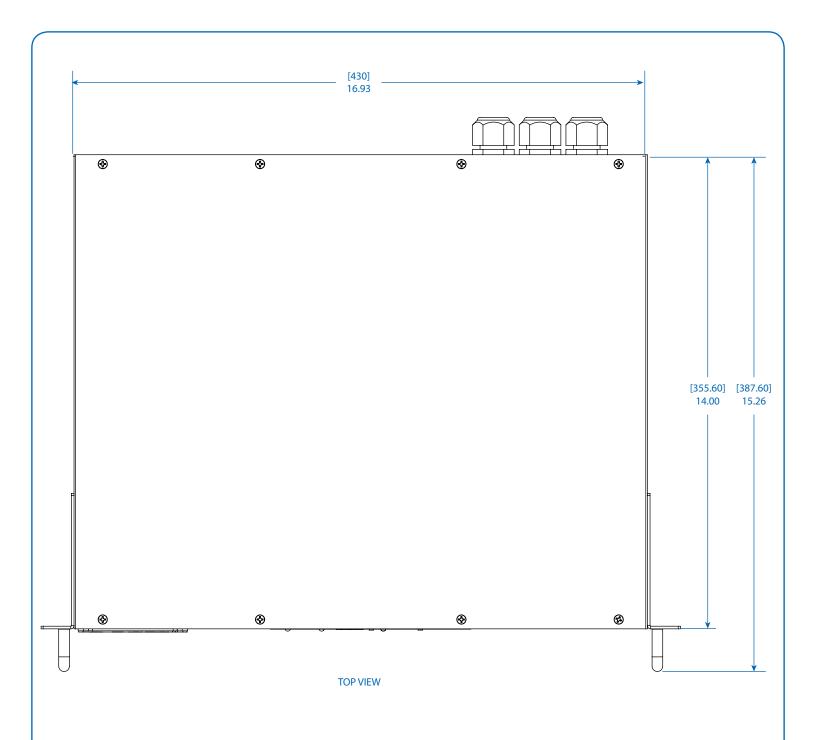





1111 W. 35th Street Chicago, IL 60609 USA 773.869.1234 www.tripplite.com

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.