


# Printed-circuit board connector - FMCD 1,5/ 4-ST-3,5 - 1738827

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

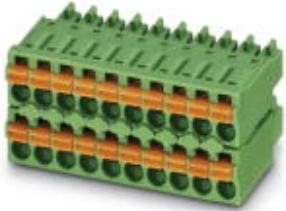


PCB connector, nominal current: 8 A, rated voltage (III/2): 160 V, number of positions: 4, pitch: 3.5 mm, connection method: Push-in spring connection, color: green, contact surface: Tin


The figure shows a 10-pos. version with 20 contacts

## Why buy this product

- Time saving push-in connection, tools not required
- Defined contact force ensures that contact remains stable over the long term
- Intuitive use through colour coded actuation lever
- Operation and conductor connection from one direction enable integration into front of device

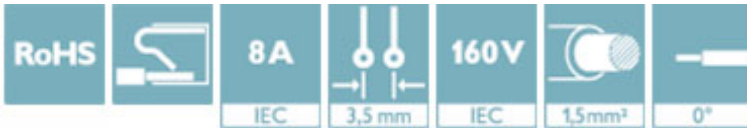

## Key Commercial Data

|              |   |
|--------------|---|
| Packing unit | 50 STK  |
| GTIN         | <br>4 046356 295123 |
| GTIN         | 4046356295123   |

## Technical data

### Dimensions

|              |          |
|--------------|----------|
| Length [ l ] | 22.9 mm  |
| Width [ w ]  | 14.75 mm |
| Height [ h ] | 16 mm    |
| Pitch        | 3.5 mm   |
| Dimension a  | 10.5 mm  |

### General

|                           |                           |
|---------------------------|---------------------------|
| Range of articles         | FMCD 1,5/...-ST           |
| Type of contact           | Female connector          |
| Number of positions       | 4                         |
| Connection method         | Push-in spring connection |
| Insulating material group | I                         |

# Printed-circuit board connector - FMCD 1,5/ 4-ST-3,5 - 1738827

## Technical data

### General

|  |                     |
|--|---------------------|
| Rated surge voltage (III/3)            | 2.5 kV              |
| Rated surge voltage (III/2)            | 2.5 kV              |
| Rated surge voltage (II/2)             | 2.5 kV              |
| Rated voltage (III/3)                  | 160 V               |
| Rated voltage (III/2)                  | 160 V               |
| Rated voltage (II/2)                   | 320 V               |
| Connection in acc. with standard       | EN-VDE              |
| Nominal current $I_N$                  | 8 A                 |
| Nominal cross section                  | 1.5 mm <sup>2</sup> |
| Maximum load current                   | 8 A                 |
| Insulating material                    | PA                  |
| Flammability rating according to UL 94 | V0                  |
| Internal cylindrical gage              | A1                  |
| Stripping length                       | 10 mm               |

### Connection data

|  |                      |
|--|----------------------|
| Conductor cross section solid min.   | 0.2 mm <sup>2</sup>  |
| Conductor cross section solid max.   | 1.5 mm <sup>2</sup>  |
| Conductor cross section flexible min.                                      | 0.2 mm <sup>2</sup>  |
| Conductor cross section flexible max.                                      | 1.5 mm <sup>2</sup>  |
| Conductor cross section flexible, with ferrule without plastic sleeve min. | 0.25 mm <sup>2</sup> |
| Conductor cross section flexible, with ferrule without plastic sleeve max. | 1.5 mm <sup>2</sup>  |
| Conductor cross section flexible, with ferrule with plastic sleeve min.    | 0.25 mm <sup>2</sup> |
| Conductor cross section flexible, with ferrule with plastic sleeve max.    | 0.75 mm <sup>2</sup> |
| Conductor cross section AWG min.   | 24                   |
| Conductor cross section AWG max.   | 16                   |
| Minimum AWG according to UL/CUL  | 24                   |
| Maximum AWG according to UL/CUL  | 16                   |

### Standards and Regulations

|  |        |
|--|--------|
| Connection in acc. with standard       | EN-VDE |
|  | CUL    |
| Flammability rating according to UL 94 | V0     |


### Environmental Product Compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

## Drawings

# Printed-circuit board connector - FMCD 1,5/ 4-ST-3,5 - 1738827

Dimensional drawing

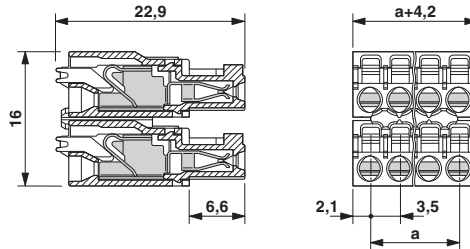

## Approvals

### Approvals

Approvals

VDE Gutachten mit Fertigungsüberwachung / IEC60320 CB Scheme / EAC / cULus Recognized

Ex Approvals

### Approval details


|  |         |  |          |
|--|---------|--|----------|
| VDE Gutachten mit<br>Fertigungsüberwachung |         | <a href="http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx">http://www2.vde.com/de/Institut/Online-Service/<br/>VDE-gepruefteProdukte/Seiten/Online-Suche.aspx</a> | 40011723 |
| Nominal voltage UN                         | 160 V   |  |          |
| Nominal current IN                         | 8 A     |  |          |
| mm <sup>2</sup> /AWG/kcmil                 | 0.2-1.5 |  |          |

|                            |         |   |                |
|----------------------------|---------|---|----------------|
| IECEE CB Scheme            |         | <a href="http://www.iecee.org/">http://www.iecee.org/</a> | DE1-60604-B1B2 |
| Nominal voltage UN         | 160 V   |   |                |
| Nominal current IN         | 8 A     |   |                |
| mm <sup>2</sup> /AWG/kcmil | 0.2-1.5 |   |                |

|     |  |         |
|-----|--|---------|
| EAC |  | B.01742 |
|-----|--|---------|

# Printed-circuit board connector - FMCD 1,5/ 4-ST-3,5 - 1738827

## Approvals

|                            |   |   |
|----------------------------|---|---|
| cULus Recognized           |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> E60425-19920306 |
|                            |   | B   |
| Nominal voltage UN         |   | 150 V   |
| Nominal current IN         |   | 8 A   |
| mm <sup>2</sup> /AWG/kcmil |   | 24-16   |

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>